
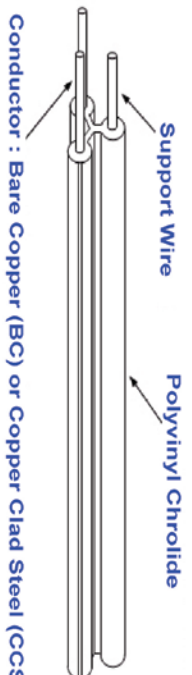
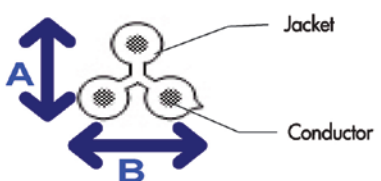


Drop Wire Cable

Drop Wire (Outdoor Drop Wire Cable)

Jacket Color	
Cable Construction	
	
	
<p>Packing Information</p> <p>Length : 200M/Coil : 500M/Coil : 1000M/Coil</p>	

Applications

- : High Strength Galvanized Steel Support Wire
- : High Quality PVC Jacket
- : Interconnecting Outdoor Telephone System
- : Interconnecting Village Audio Broadcasting System
- : Stranded or Solid, Copper or Copper Clad Steel Center Conductor

PHYSICAL CONSTRUCTIONS							
Product Code	No. of Core	Conductor Diameter	Nominal Insulation Thickness	Nominal Diameter of Support Wire	Approx. Overall Diameter		Standard Length
	©	(mm)	(+0.20mm)	(mm)	A (+0.20mm)	B (+0.20mm)	
CM-DW-SB1722	2	0.65 BC	1.4	1.2	7.3	8	200
CM-DW-SB1720	2	0.90 BC	1.3	1.2			200
CM-DW-S1718	2	1.02 CCS	1.25	1.2			200
ELECTRICAL SPECIFICATIONS							
@20C	Ø0.65 mm Bare Copper		Ø0.90 mm Bare Copper		Ø1.02 mm Copper Clad Steel		
Nom. Inner DC Resistance	55.09 Ohm/Km		29.20 Ohm/Km		120.00 Ohm/Km		

Note : Others conductor size and length per coil are all available upon request.